HOT

COLD

Power Supply Unit with Integrated Led Driver	2722 171 90441 PLDG-P009A

2011-01-30

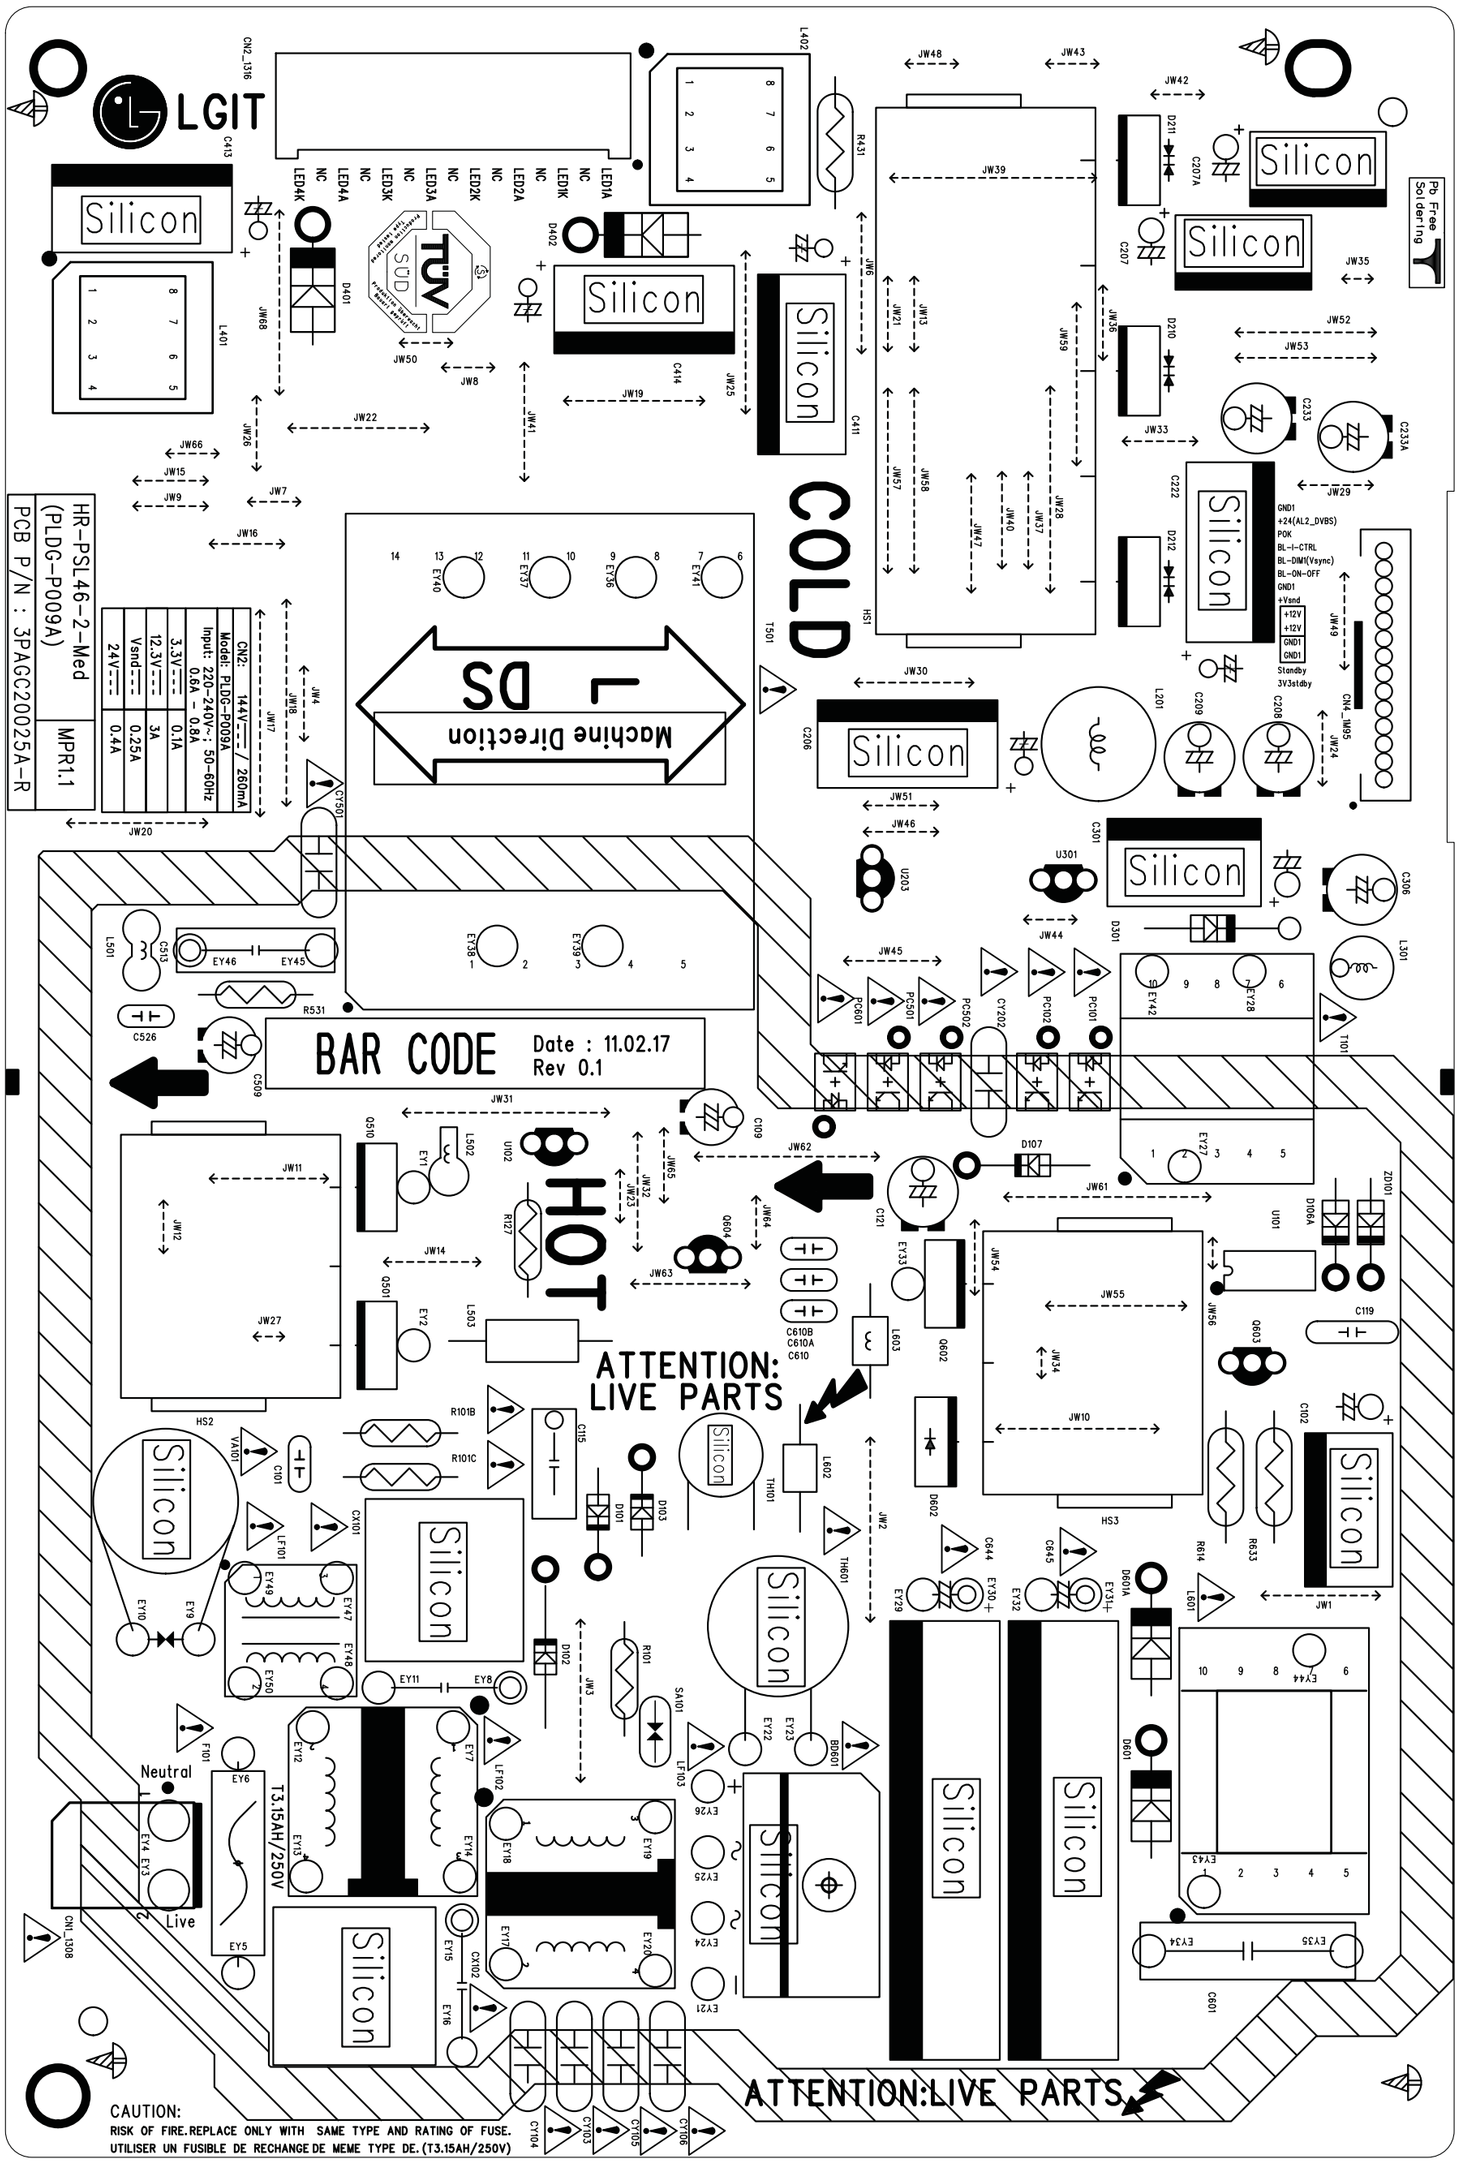
LGIT
HR-PSL46-2-Med
(PLDG-P009A)
MPR1.1
PCB P/N : 3PAGC20025A-R
CN2: 14V⎓ / 260mA
Model: PLDG-P009A
Input: 220-240V~: 50-60Hz
3.3V⎓ 0.6A - 0.8A
12.3V⎓ 0.1A
Vsnd⎓ 3A
24V⎓ 0.25A
0.4A
Machine Direction
COLD
HOT
BAR CODE
Date : 11.02.17
Rev 0.1
ATTENTION:
LIVE PARTS
ATTENTION:LIVE PARTS
Neutral
Live
T3.15AH/250V
CAUTION:
RISK OF FIRE.REPLACE ONLY WITH SAME TYPE AND RATING OF FUSE.
UTILISER UN FUSIBLE DE RECHANGE DE MEME TYPE DE.(T3.15AH/250V)
Pb Free Soldering
Silicon
GND1
+24(AL2_DVBS)
POK
BL-I-CTRL
BL-DIM(Vsync)
BL-ON-OFF
GND1
+Vsnd
+12V
+12V
GND1
GND1
Standby
3V3stdby